

PCB Terminal Block


10.00 mm Pin Spacing

- Board Mount PCB
- 20A Current Rating
- Height 10.2mm
- Modular / Stackable, no dovetail version



MBE15xx-10-V

Front Wire Entry



Box Clamp with Wire Protector

Electrical Ratings		UL E178356		IEC	VDE N.40019705
Usergroup		B	C	D	-
Rated Voltage		300V	300V	600V	750V
Rated Current		20A	-	20A	17.5A
Wire Size	<i>solid</i>	30-14 AWG	-	30-14 AWG	0.25mm ² - 2.5mm ²
	<i>stranded</i>	30-14 AWG	-	30-14 AWG	0.25mm ² - 2.5mm ²


Ordering Information

No. Poles	Length (mm)	Std. Pack	Order # - Modular	Order # - No Dovetails
2	15.0	100	MBE152-10-V	MBE152-10-V-L
3	25.0	100	MBE153-10-V	MBE153-10-V-L
4	35.0	100	MBE154-10-V	MBE154-10-V-L
5	45.0	100	MBE155-10-V	MBE155-10-V-L
6	55.0	100	MBE156-10-V	MBE156-10-V-L

Material Specifications	
Clamp	Tin-Plated Copper
Solder tab	Tin-Plated Copper
Screw	Galvanized Steel
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C

Installation Data	
Screw Size	M2.5
Torque	0.4 Nm (3.6 lb.in.)
Stripping Length	max. 8mm
Clamp Opening	2.6 x 2.4mm
PCB Hole Size	1.5mm

Dimensions (mm)

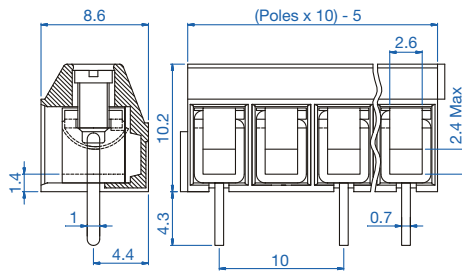

Drilling Diagram

