

## PCB Terminal Block


5.08 mm Pin Spacing

- Board Mount PCB
- 20A Current Rating
- Height 10.2mm
- Stackable. no dovetails



# MBE15xx-5.08-V-L

Front Wire Entry



Box Clamp with Wire Protector

### Electrical Ratings

Usergroup	B	C	D	
Rated Voltage	300V	-	300V	450V
Rated Current	20A	-	20A	24A
Wire Size	<i>solid</i> 30-14 AWG <i>stranded</i> 30-14 AWG	-	30-14 AWG	0.25mm <sup>2</sup> - 2.5mm <sup>2</sup>

UL US  
E178356

IEC

VDE  
N.40019705

### Ordering Information

No. Poles	Length (mm)	Std. Pack	Order #
2	10.16	100	MBE152-5,08-V-L
3	15.24	100	MBE153-5,08-V-L
4	20.32	100	MBE154-5,08-V-L
5	25.40	100	MBE155-5,08-V-L
6	30.48	100	MBE156-5,08-V-L
7	35.56	100	MBE157-5,08-V-L
8	40.64	100	MBE158-5,08-V-L
9	45.72	100	MBE159-5,08-V-L
10	50.80	100	MBE1510-5,08-V-L
11	55.88	100	MBE1511-5,08-V-L
12	60.96	100	MBE1512-5,08-V-L
13	66.04	50	MBE1513-5,08-V-L
14	71.12	50	MBE1514-5,08-V-L
15	76.20	50	MBE1515-5,08-V-L
16	81.28	50	MBE1516-5,08-V-L
17	86.36	50	MBE1517-5,08-V-L
18	91.44	50	MBE1518-5,08-V-L
19	96.52	50	MBE1519-5,08-V-L
20	101.60	50	MBE1520-5,08-V-L
21	106.68	50	MBE1521-5,08-V-L
22	111.76	50	MBE15225,08-V-L
23	116.84	50	MBE1523-5,08-V-L
24	121.92	50	MBE1524-5,08-V-L


### Material Specifications

Clamp	Nickel Copper
Solder tab	Tin-Plated Copper
Screw	Galvanized Steel
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C

### Installation Data

Screw Size	M2.5
Torque	0.4Nm (3.6 lb.in.)
Stripping Length	max. 8mm
Clamp Opening	2.6 x 2.0mm
PCB Hole Size	1.5mm

### Dimensions (mm)

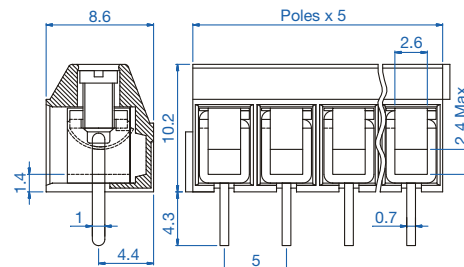

### Drilling Diagram

