

PCB Terminal Block


5.00 mm Pin Spacing

- Board Mount PCB
- 20A Current Rating
- Height 9mm
- Modular



MHE-16xx

Top Wire Entry



Box Clamp with Wire Protector

Electrical Ratings		C  US E178356		  N.40019705
Usergroup		B	C	D
Rated Voltage		300V	-	300V
Rated Current		20A	-	20A
Wire Size	<i>solid</i>	30-14 AWG	-	30-14 AWG
	<i>stranded</i>	30-14 AWG	-	30-14 AWG
				0.25mm ² - 4.0mm ²
				0.25mm ² - 2.5mm ²

Ordering Information

No. Poles	Length (mm)	Std. Pack	Order #
2	10.0	100	MHE-162
3	15.0	100	MHE-163
4	20.0	100	MHE-164
5	25.0	100	MHE-165
6	30.0	100	MHE-166
7	35.0	100	MHE-167
8	40.0	100	MHE-168
9	45.0	100	MHE-169
10	50.0	100	MHE-1610
11	55.0	100	MHE-1611
12	60.0	100	MHE-1612
13	65.0	100	MHE-1613
14	70.0	100	MHE-1614
15	75.0	100	MHE-1615
16	80.0	100	MHE-1616
17	85.0	100	MHE-1617
18	90.0	100	MHE-1618
19	95.0	100	MHE-1619
20	100.0	100	MHE-1620
21	105.0	100	MHE-1621
22	110.0	100	MHE-1622
23	115.0	100	MHE-1623
24	120.0	100	MHE-1624


Material Specifications

Clamp	Tin-Plated Copper
Solder tab	Tin-Plated Copper
Screw	Galvanized Steel
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C

Installation Data

Screw Size	M3 
Torque	0.5 Nm (4.5 lb.in.)
Stripping Length	max. 6mm
Clamp Opening	3.1 x 3.1mm
PCB Hole Size	1.3mm

Dimensions (mm)

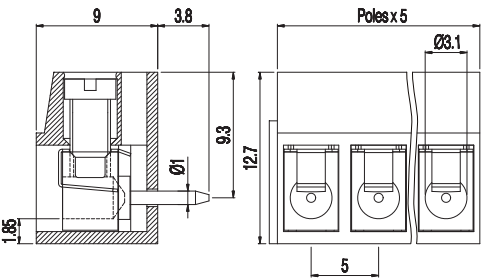

Drilling Diagram

