


PCB Terminal Block


3.50 mm Pin Spacing

- Board Mount PCB
- 6A Current Rating
- Height 6.8mm
- Modular



MLK13xx-3,5-H

Top Wire Entry



Box Clamp with
Wire Protector

Electrical Ratings

Usergroup	B	C	D	
Rated Voltage	300V	-	300V	130V
Rated Current	6A	-	6A	10A
Wire Size	<i>solid</i> 24-16 AWG	-	24-16 AWG	0.25mm ² - 1.5mm ²
	<i>stranded</i> 24-18 AWG	-	24-18 AWG	0.25mm ² - 1.0mm ²

UL
E178356

IEC

VDE
N.40019705

Ordering Information

No. Poles	Length (mm)	Std. Pack	Order # - Single Mold
2	7.0	500	MLK132-3,5-H
3	10.5	500	MLK133-3,5-H
4	14.0	500	MLK134-3,5-H
5	17.5	500	MLK135-3,5-H
6	21.0	200	MLK136-3,5-H
7	24.5	200	MLK137-3,5-H
8	28.0	200	MLK138-3,5-H
9	31.5	200	MLK139-3,5-H
10	35.0	200	MLK1310-3,5-H
11	38.5	100	MLK1311-3,5-H
12	42.0	100	MLK1312-3,5-H
13	45.5	100	MLK1313-3,5-H
14	49.0	100	MLK1314-3,5-H


Material Specifications

Clamp	Nickel Copper
Solder tab	Tin-Plated Copper
Screw	Galvanized Steel
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C

Installation Data

Screw Size	M2
Torque	0.2Nm (1.8 lb.in.)
Stripping Length	max. 6mm
Clamp Opening	1.8 x 1.8mm
PCB Hole Size	1.3mm

Dimensions (mm)

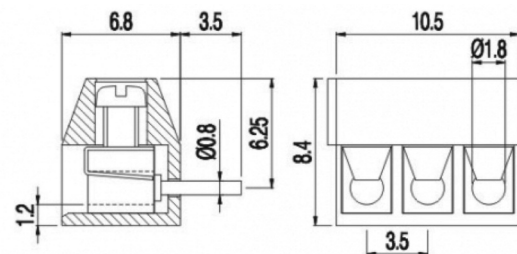

Drilling Diagram

