


PCB Terminal Block

- 10.00 mm Pin Spacing
- Board Mount PCB
 - 13.5A Current Rating
 - Height 10.6mm
 - Modular / Stackable, no dovetail version



MV15xx-10-V

Front Wire Entry



Screw
Cage Clamp
(lift type)

Electrical Ratings		UL E178356		IEC	VDE N.40019705
Usergroup	B	C	D	-	
Rated Voltage	600V	-	600V	750V	
Rated Current	13.5A	-	13.5A	13.5A	
Wire Size	<i>solid</i>	30-16 AWG	-	30-16 AWG	0.25mm ² - 1.5mm ²
	<i>stranded</i>	30-16 AWG	-	30-16 AWG	0.25mm ² - 1.5mm ²


Ordering Information

No. Poles	Length (mm)	Std. Pack	Order # - Modular	Order # - No Dovetails
2	15.0	100	MV152-10-V	MV152-10-V-L
3	25.0	100	MV153-10-V	MV153-10-V-L
4	35.0	100	MV154-10-V	MV154-10-V-L
5	45.0	100	MV155-10-V	MV155-10-V-L
6	55.0	100	MV156-10-V	MV156-10-V-L

Material Specifications	
Clamp	Nickel-Copper
Solder tab	Tin-Plated Copper
Screw	Galvanized Steel
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C

Installation Data	
Screw Size	M3
Torque	0.5 Nm (4.5 lb.in.)
Stripping Length	max. 6mm
Clamp Opening	2.6 x 2mm
PCB Hole Size	1.3mm

Dimensions (mm)

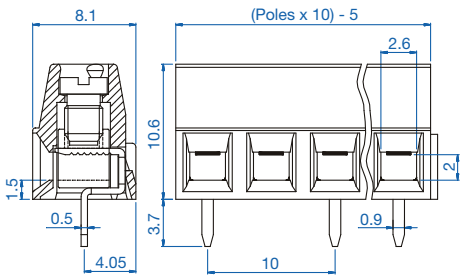

Drilling Diagram

