


PCB Terminal Block


5.08 mm Pin Spacing

- Board Mount PCB
- 13.5A Current Rating
- Height 8.1mm
- Modular / Stackable, no dovetail version



MV15xx-5,08-H

Top Wire Entry



Electrical Ratings

		C ^{UL} E178356			IEC N.40019705	
Usergroup		B	C	D	-	
Rated Voltage		300V	300V	300V	250V	
Rated Current		13.5A	13.5A	13.5A	13.5A	
Wire Size	<i>solid</i>	30-16 AWG	30-16 AWG	30-16 AWG	0.25mm ² - 1.5mm ²	
	<i>stranded</i>	30-16 AWG	30-16 AWG	30-16 AWG	0.25mm ² - 1.5mm ²	

Ordering Information

No. Poles	Length (mm)	Std. Pack	Order # - Modular	Order # - No Dovetail
2	10.16	200	MV152-5,08-H	MV152-5,08-H-L
3	15.24	200	MV153-5,08-H	MV153-5,08-H-L
4	20.32	100	MV154-5,08-H	MV154-5,08-H-L
5	25.40	100	MV155-5,08-H	MV155-5,08-H-L
6	30.48	100	MV156-5,08-H	MV156-5,08-H-L
7	35.56	100	MV157-5,08-H	MV157-5,08-H-L
8	40.64	100	MV158-5,08-H	MV158-5,08-H-L
9	45.72	100	MV159-5,08-H	MV159-5,08-H-L
10	50.80	100	MV1510-5,08-H	MV1510-5,08-H-L
11	55.88	100	MV1511-5,08-H	MV1511-5,08-H-L
12	60.96	100	MV1512-5,08-H	MV1512-5,08-H-L
13	66.04	50	MV1513-5,08-H	MV1513-5,08-H-L
14	71.12	50	MV1514-5,08-H	MV1514-5,08-H-L
15	76.20	50	MV1515-5,08-H	MV1515-5,08-H-L
16	81.28	50	MV1516-5,08-H	MV1516-5,08-H-L
17	86.36	50	MV1517-5,08-H	MV1517-5,08-H-L
18	91.44	50	MV1518-5,08-H	MV1518-5,08-H-L
19	96.52	50	MV1519-5,08-H	MV1519-5,08-H-L
20	101.60	50	MV1520-5,08-H	MV1520-5,08-H-L
21	106.68	50	MV1521-5,08-H	MV1521-5,08-H-L
22	111.76	50	MV1522-5,08-H	MV1522-5,08-H-L
23	116.84	50	MV1523-5,08-H	MV1523-5,08-H-L
24	121.92	50	MV1524-5,08-H	MV1524-5,08-H-L


Material Specifications

Clamp	Nickel Copper
Solder tab	Tin-Plated Copper
Screw	Galvanized Steel
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C

Installation Data

Screw Size	M3
Torque	0.5 Nm (4.5 lb.in.)
Stripping Length	max. 6mm
Clamp Opening	2.6 x 2.0mm
PCB Hole Size	1.3mm

Dimensions (mm)

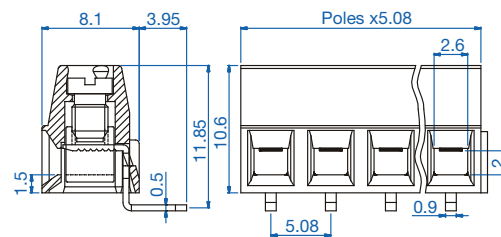

Drilling Diagram

