


PCB Terminal Block


5.08 mm Pin Spacing

- Board Mount PCB
- 18A Current Rating
- Height 16mm
- Modular
- Double Row Pins



MV25Dxx-5,08-V

Front Wire Entry / Double Pin



Electrical Ratings

Usergroup	B	C	D	
Rated Voltage	300V	-	300V	250V
Rated Current	18A	-	18A	24A
Wire Size				
<i>solid</i>	30-14 AWG	-	30-14 AWG	0.25mm ² - 4.0mm ²
<i>stranded</i>	30-14 AWG	-	30-14 AWG	0.25mm ² - 2.5mm ²



Ordering Information

No. Poles	Length (mm)	Std. Pack	Order #
2	10.16	100	MV-252-D
3	15.24	100	MV-253-D
4	20.32	100	MV-254-D
5	25.40	100	MV-255-D
6	30.48	100	MV-256-D
7	35.56	100	MV-257-D
8	40.64	100	MV-258-D
9	45.72	100	MV-259-D
10	50.80	100	MV-2510-D
11	55.88	100	MV-2511-D
12	60.96	100	MV-2512-D
13	66.04	50	MV-2513-D
14	71.12	50	MV-2514-D
15	76.20	50	MV-2515-D
16	81.28	50	MV-2516-D
17	86.36	50	MV-2517-D
18	91.44	50	MV-2518-D
19	96.52	50	MV-2519-D
20	101.60	50	MV-2520-D
21	106.68	50	MV-2521-D
22	111.76	50	MV-2522-D
23	116.84	50	MV-2523-D
24	121.92	50	MV-2524-D


Material Specifications

Clamp	Nickel Copper
Solder tab	Tin-Plated Copper
Screw	Galvanized Steel
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C

Installation Data

Screw Size	M3
Torque	0.8Nm (4.5 lb.in.)
Stripping Length	max. 8mm
Clamp Opening	2.8 x 2.8mm
PCB Hole Size	1.3mm

Dimensions (mm)

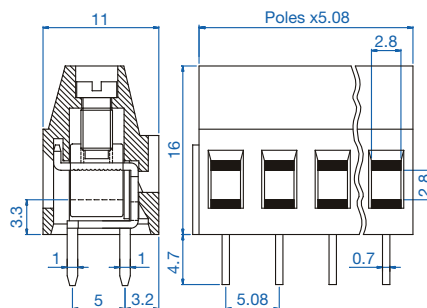

Drilling Diagram

