


PCB Terminal Block

- 10.00 mm Pin Spacing
- Board Mount PCB
 - 20A Current Rating
 - Height 13.5mm
 - Modular / Stackable, no dovetail version



MVE15xx-10-V

Front Wire Entry



Box Clamp with Wire Protector

Electrical Ratings

Usergroup	B	C	D	-
Rated Voltage	300V	300V	600V	750V
Rated Current	20A	-	20A	17.5A
Wire Size	<i>solid</i> 30-14 AWG <i>stranded</i> 30-14 AWG	-	30-14 AWG	0.25mm ² - 2.5mm ²



Ordering Information

No. Poles	Length (mm)	Std. Pack	Order # - Modular	Order # - No Dovetails
2	15.0	100	MVEB-152	MVE152-10-V-L
3	25.0	100	MVEB-153	MVE153-10-V-L
4	35.0	100	MVEB-154	MVE154-10-V-L
5	45.0	100	MVEB-155	MVE155-10-V-L
6	55.0	100	MVEB-156	MVE156-10-V-L
7	65.0	50	MVEB-157	MVE157-10-V-L
8	75.0	50	MVEB-158	MVE158-10-V-L
9	85.0	50	MVEB-159	MVE159-10-V-L
10	95.0	50	MVEB-1510	MVE1510-10-V-L
11	105.0	50	MVEB-1511	MVE1511-10-V-L
12	115.0	50	MVEB-1512	MVE1512-10-V-L


Material Specifications

Clamp	Tin-Plated Copper
Solder tab	Tin-Plated Copper
Screw	Galvanized Steel
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C

Installation Data

Screw Size	M2.5
Torque	0.4 Nm (3.6 lb.in.)
Stripping Length	max. 7mm
Clamp Opening	2.6 x 2.4mm
PCB Hole Size	1.5mm

Dimensions (mm)

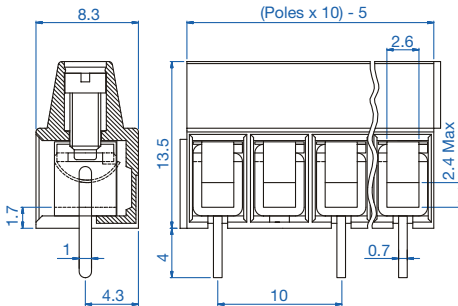

Drilling Diagram

