

PCB Terminal Block


5.00 mm Pin Spacing

- Board Mount PCB
- 26A Current Rating
- Height 12.8mm
- Single Mold Terminal



MVE26xx-5-V

Front Wire Entry



Box Clamp with
Wire Protector

Electrical Ratings

Usergroup	B	C	D	
Rated Voltage	300V	-	300V	450V
Rated Current	26A	-	26A	24A
Wire Size	<i>solid</i> 30-12 AWG	-	30-12 AWG	0.25mm ² - 4.0mm ²
	<i>stranded</i> 30-12 AWG	-	30-12 AWG	0.25mm ² - 2.5mm ²

C_{UL} US
E178356

IEC

VDE
N.40019705

Ordering Information

No. Poles	Length (mm)	Std. Pack	Order #
2	11.9	100	MVE262-5-V
3	16.9	100	MVE263-5-V
4	21.9	100	MVE264-5-V
5	26.9	100	MVE265-5-V
6	31.9	100	MVE266-5-V
7	36.9	100	MVE267-5-V
8	41.9	100	MVE268-5-V
9	46.9	100	MVE269-5-V
10	51.0	100	MVE2610-5-V
11	56.9	100	MVE2611-5-V
12	61.9	100	MVE2612-5-V
13	66.9	100	MVE2613-5-V
14	71.9	100	MVE2614-5-V
15	76.9	100	MVE2615-5-V
16	81.9	100	MVE2616-5-V
17	86.9	100	MVE2617-5-V
18	91.9	100	MVE2618-5-V
19	96.9	100	MVE2619-5-V
20	101.9	100	MVE2620-5-V
21	106.9	100	MVE2621-5-V
22	111.9	100	MVE2622-5-V
23	116.9	100	MVE2623-5-V
24	121.9	100	MVE2624-5-V


Material Specifications

Clamp	Tin-Plated Copper
Solder tab	Tin-Plated Copper
Screw	Galvanized Steel
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C

Installation Data

Screw Size	M3
Torque	0.5Nm (4.5 lb.in.)
Stripping Length	max. 7.5mm
Clamp Opening	3.0 x 2.5mm
PCB Hole Size	1.5mm

Dimensions (mm)

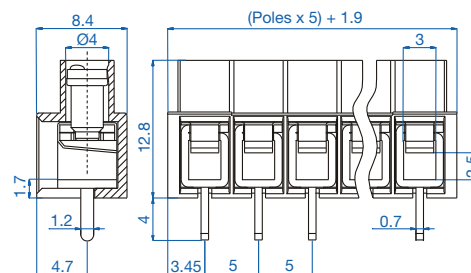

Drilling Diagram

