


PCB Terminal Block

- 7.50 mm Pin Spacing
- Board Mount PCB
 - 26A Current Rating
 - Height 12.8mm
 - Single Mold Terminal



MVE26xx-7,5-V-L

Front Wire Entry



Box Clamp with Wire Protector

Electrical Ratings

		C  US E178356		  N.40019705
Usergroup		B	C	D
Rated Voltage		300V	-	300V
Rated Current		26A	-	26A
Wire Size	<i>solid</i>	30-12 AWG	-	30-12 AWG
	<i>stranded</i>	30-12 AWG	-	30-12 AWG
				0.25mm ² - 4.0mm ²
				0.25mm ² - 2.5mm ²

Ordering Information

No. Poles	Length (mm)	Std. Pack	Order #
2	15.0	100	MVE262-7,5-V-L
3	22.5	100	MVE263-7,5-V-L
4	30.0	100	MVE264-7,5-V-L
5	37.5	100	MVE265-7,5-V-L
6	45.0	100	MVE266-7,5-V-L
7	52.5	100	MVE267-7,5-V-L
8	60.0	100	MVE268-7,5-V-L
9	67.5	100	MVE269-7,5-V-L
10	75.0	100	MVE2610-7,5-V-L
11	82.5	100	MVE2611-7,5-V-L
12	90.0	100	MVE2612-7,5-V-L


Material Specifications

Clamp	Tin-Plated Copper
Solder tab	Tin-Plated Copper
Screw	Galvanized Steel
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C

Installation Data

Screw Size	M3 
Torque	0.5 Nm (4.5 lb.in.)
Stripping Length	max. 7.5mm
Clamp Opening	3.0 x 2.5mm
PCB Hole Size	1.5mm

Dimensions (mm)

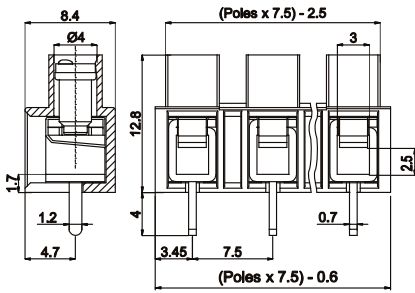

Drilling Diagram

