


PCB Terminal Block


7.50 mm Pin Spacing

- Board Mount PCB
- 16A Current Rating
- Height 8.9mm
- Modular
- Reverse Wire Entry



MVE27xx-7,5-HR

Bottom Wire Entry



**Screw
Cage Clamp
(lift type)**

Electrical Ratings

		C ¹  E178356		IEC  VDE  N.40019705	
Usergroup		B	C	D	-
Rated Voltage		300V	-	300V	750V
Rated Current		16A	-	16A	16A
Wire Size	<i>solid</i>	30-14 AWG	-	30-14 AWG	0.25mm ² - 4.0mm ²
	<i>stranded</i>	30-14 AWG	-	30-14 AWG	0.25mm ² - 2.5mm ²

Ordering Information

No. Poles	Length (mm)	Std. Pack	Order #
2	15.0	100	MHR-272
3	22.5	100	MHR-273
4	30.0	100	MHR-274
5	37.5	100	MHR-275
6	45.0	100	MHR-276
7	52.5	100	MHR-277
8	60.0	100	MHR-278
9	67.5	100	MHR-279
10	75.0	100	MHR-2710
11	82.5	100	MHR-2711
12	90.0	100	MHR-2712
13	97.5	50	MHR-2713
14	105.0	50	MHR-2714
15	112.5	50	MHR-2715
16	120.0	50	MHR-2716


Material Specifications

Clamp	Tin-Plated Copper
Solder tab	Tin-Plated Copper
Screw	Galvanized Steel
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C

Installation Data

Screw Size	M3 
Torque	0.5 Nm (4.5 lb.in.)
Stripping Length	max. 7mm
Clamp Opening	2.8 x 2.7mm
PCB Hole Size	1.3mm

Dimensions (mm)

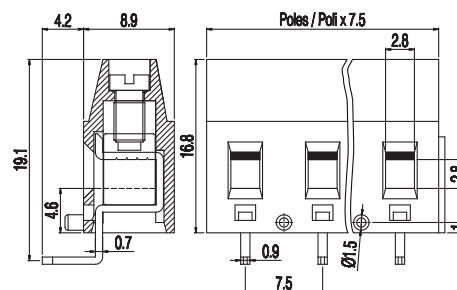

Drilling Diagram

