



PCB Terminal Block

- 10.00 mm Pin Spacing
- Board Mount PCB
 - 17.5A Current Rating
 - Height 13.2mm
 - Modular / Stackable, no dovetail version



MVS15xx-10-V

Front Wire Entry



Screw
Cage Clamp
(lift type)

Electrical Ratings

		C ^{UL} US E178356		IEC	VDE N.40019705
Usergroup	B	C	D	-	
Rated Voltage	600V	-	600V	750V	
Rated Current	17.5A	-	17.5A	17.5A	
Wire Size	<i>solid</i>	30-16 AWG	-	30-16 AWG	0.25mm ² - 2.5mm ²
	<i>stranded</i>	30-16 AWG	-	30-16 AWG	0.25mm ² - 1.5mm ²

Ordering Information

No. Poles	Length (mm)	Std. Pack	Order # - Modular	Order # - No Dovetails
2	15.0	100	MVS152-10-V	MVS152-10-V-L
3	25.0	100	MVS153-10-V	MVS153-10-V-L
4	35.0	100	MVS154-10-V	MVS154-10-V-L
5	45.0	100	MVS155-10-V	MVS155-10-V-L
6	55.0	100	MVS156-10-V	MVS156-10-V-L


Material Specifications

Clamp	Nickel Copper
Solder tab	Tin-Plated Copper
Screw	Galvanized Steel
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C

Installation Data

Screw Size	M3
Torque	0.5Nm (4.5 lb.in.)
Stripping Length	max. 7mm
Clamp Opening	2.5 x 2.1mm
PCB Hole Size	1.5mm

Dimensions (mm)

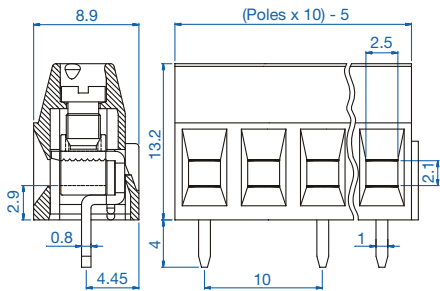

Drilling Diagram

