


PCB Terminal Block

5.08 mm Pin Spacing

- Board Mount PCB
- 17.5A Current Rating
- Height 8.9mm
- Modular / Stackable, no dovetail version



Electrical Ratings

Usergroup		B	C	D	
Rated Voltage		300V	-	300V	450V
Rated Current		17.5A	-	17.5A	17.5A
Wire Size	<i>solid</i>	30-16 AWG	-	30-16 AWG	0.25mm ² - 2.5mm ²
	<i>stranded</i>	30-16 AWG	-	30-16 AWG	0.25mm ² - 1.5mm ²

C US
E178356

IEC

VDE
N.40019705

Ordering Information

No. Poles	Length (mm)	Std. Pack	Order # - Modular	Order # - No Dovetails
2	10.16	200	MVS152-5,08-H	MVS152-5,08-H-L
3	15.24	200	MVS153-5,08-H	MVS153-5,08-H-L
4	20.32	100	MVS154-5,08-H	MVS154-5,08-H-L
5	25.40	100	MVS155-5,08-H	MVS155-5,08-H-L
6	30.48	100	MVS156-5,08-H	MVS156-5,08-H-L
7	35.56	100	MVS157-5,08-H	MVS157-5,08-H-L
8	40.64	100	MVS158-5,08-H	MVS158-5,08-H-L
9	45.72	100	MVS159-5,08-H	MVS159-5,08-H-L
10	50.80	100	MVS1510-5,08-H	MVS1510-5,08-H-L
11	55.88	100	MVS1511-5,08-H	MVS1511-5,08-H-L
12	60.96	100	MVS1512-5,08-H	MVS1512-5,08-H-L
13	66.04	50	MVS1513-5,08-H	MVS1513-5,08-H-L
14	71.12	50	MVS1514-5,08-H	MVS1514-5,08-H-L
15	76.20	50	MVS1515-5,08-H	MVS1515-5,08-H-L
16	81.28	50	MVS1516-5,08-H	MVS1516-5,08-H-L
17	86.36	50	MVS1517-5,08-H	MVS1517-5,08-H-L
18	91.44	50	MVS1518-5,08-H	MVS1518-5,08-H-L
19	96.52	50	MVS1519-5,08-H	MVS1519-5,08-H-L
20	101.60	50	MVS1520-5,08-H	MVS1520-5,08-H-L
21	106.68	50	MVS1521-5,08-H	MVS1521-5,08-H-L
22	111.76	50	MVS1522-5,08-H	MVS1522-5,08-H-L
23	116.84	50	MVS1523-5,08-H	MVS1523-5,08-H-L
24	121.92	50	MVS1524-5,08-H	MVS1524-5,08-H-L


Material Specifications

Clamp	Nickel Copper
Solder tab	Tin-Plated Copper
Screw	Galvanized Steel
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C

Installation Data

Screw Size	M3
Torque	0.5Nm (4.5 lb.in.)
Stripping Length	max. 7mm
Clamp Opening	2.5 x 2.1mm
PCB Hole Size	1.5mm

Dimensions (mm)

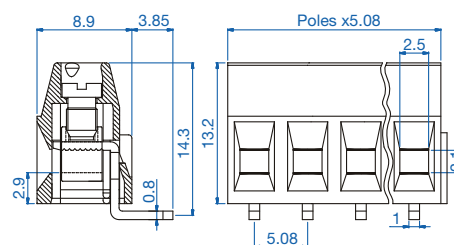

Drilling Diagram

