

PCB Terminal Block


5.08 mm Pin Spacing

- Board Mount PCB
- 18A Current Rating
- Height 12.5mm
- Modular



MVSP25xx-5,08-H

Top Wire Entry



Electrical Ratings

		UL E178356			IEC VDE N.40019705	
Usergroup		B	C	D	-	
Rated Voltage		300V	-	300V	450V	
Rated Current		18A	-	18A	24A	
Wire Size	solid	30-14 AWG	-	30-14 AWG	0.25mm ² - 4.0mm ²	
	stranded	30-14 AWG	-	30-14 AWG	0.25mm ² - 2.5mm ²	

Ordering Information

No. Poles	Length (mm)	Std. Pack	Order #
2	10.16	100	MHSP-252
3	15.24	100	MHSP-253
4	20.32	100	MHSP-254
5	25.40	100	MHSP-255
6	30.48	100	MHSP-256
7	35.56	100	MHSP-257
8	40.64	100	MHSP-258
9	45.72	100	MHSP-259
10	50.80	100	MHSP-2510
11	55.88	100	MHSP-2511
12	60.96	100	MHSP-2512
13	66.04	50	MHSP-2513
14	71.12	50	MHSP-2514
15	76.20	50	MHSP-2515
16	81.28	50	MHSP-2516
17	86.36	50	MHSP-2517
18	91.44	50	MHSP-2518
19	96.52	50	MHSP-2519
20	101.60	50	MHSP-2520
21	106.68	50	MHSP-2521
22	111.76	50	MHSP-2522
23	116.84	50	MHSP-2523
24	121.92	50	MHSP-2524


Material Specifications

Clamp	Nickel Copper
Solder tab	Tin-Plated Copper
Screw	Galvanized Steel
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C

Installation Data

Screw Size	M3
Torque	0.8Nm (4.5 lb.in.)
Stripping Length	max. 9.5mm
Clamp Opening	2.8 x 4.0mm
PCB Hole Size	1.5mm

Dimensions (mm)

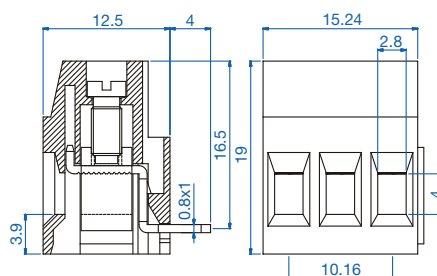

Drilling Diagram

