

PCB Terminal Block


7.62 mm Pin Spacing

- Board Mount PCB
- 20A Current Rating
- Height 12.5mm
- Modular



MVSP27xx-7,62-H

Top Wire Entry



Electrical Ratings

Usergroup	B	C	D	
Rated Voltage	300V	-	300V	750V
Rated Current	20A	-	20A	24A
Wire Size	<i>solid</i> 30-14 AWG	-	30-14 AWG	0.25mm ² - 4.0mm ²
	<i>stranded</i> 30-14 AWG	-	30-14 AWG	0.25mm ² - 2.5mm ²

C **UL** US
E178356

IEC

VDE
N.40019705

Ordering Information

No. Poles	Length (mm)	Std. Pack	Order # - Modular
2	15.24	100	MHSP-272
3	22.86	100	MHSP-273
4	30.48	100	MHSP-274
5	38.10	100	MHSP-275
6	45.72	100	MHSP-276
7	53.34	100	MHSP-277
8	60.96	100	MHSP-278
9	68.58	100	MHSP-279
10	76.20	100	MHSP-2710
11	83.82	100	MHSP-2711
12	91.44	100	MHSP-2712


Material Specifications

Clamp	Tin-Plated Copper
Solder tab	Tin-Plated Copper
Screw	Galvanized Steel
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C

Installation Data

Screw Size	M3
Torque	0.8 Nm (4.5 lb.in.)
Stripping Length	max. 9.5mm
Clamp Opening	2.8 x 4mm
PCB Hole Size	1.5mm

Dimensions (mm)

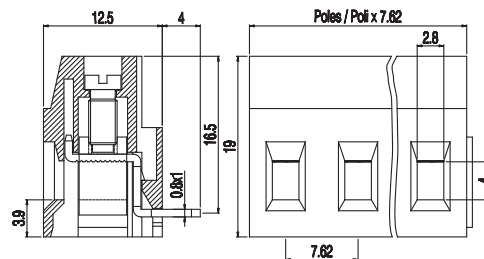

Drilling Diagram

