


PCB Terminal Block


5.08 mm Pin Spacing

- Board Mount PCB
- 20A Current Rating
- Height 18mm
- Modular



MVST25xx-5,08-V

Front Wire Entry



Electrical Ratings					 
Usergroup	B	C	D		-
Rated Voltage	300V	-	300V		250V
Rated Current	20A	-	20A		24A
Wire Size	<i>solid</i>	24-12 AWG	-	24-12 AWG	0.25mm ² - 4.0mm ²
	<i>stranded</i>	24-12 AWG	-	24-12 AWG	0.25mm ² - 2.5mm ²


Ordering Information

No. Poles	Length (mm)	Std. Pack	Order #
2	10.16	100	MVST252-5,08-V
3	15.24	100	MVST253-5,08-V
4	20.32	100	MVST254-5,08-V
5	25.40	100	MVST255-5,08-V
6	30.48	100	MVST256-5,08-V
7	35.56	100	MVST257-5,08-V
8	40.64	100	MVST258-5,08-V
9	45.72	100	MVST259-5,08-V
10	50.80	100	MVST2510-5,08-V
11	55.88	100	MVST2511-5,08-V
12	60.96	100	MVST2512-5,08-V

Material Specifications	
Clamp	CR3-Plated Steel
Solder tab	Tin-Plated Copper
Screw	Galvanized Steel
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C

Installation Data	
Screw Size	M2.5 
Torque	0.4Nm (3.5 lb.in.)
Stripping Length	max. 9.0mm
Clamp Opening	2.6 x 3.5mm
PCB Hole Size	1.5mm

Dimensions (mm)

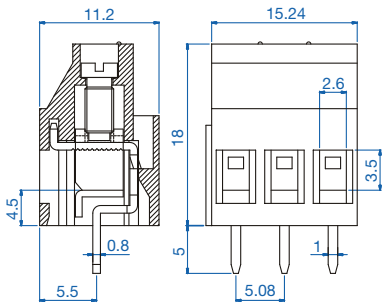

Drilling Diagram

