

UL98 Motor Disconnect Switch - Extended

- Every design is lockable in OFF position
- Switching mechanism speed is independent from the operator
- Silver contacts ensure safe and durable operation




4 Pole disconnect switch shown with optional 3 pole touch protector

Catalog Number	KU330UL98		KU360UL98		KU3100UL98	
No. of Poles*	3 (4 pole - KU430UL98)		3 (4 pole - KU460UL98)		3 (4 pole - KU4100UL98)	
General Purpose Current	30 A		60 A		100 A	
Maximum Voltage	600V AC		600V AC		600V AC	
Horsepower Rating/HP	1 Phase	3 Phase	1 Phase	3 Phase	1 Phase	3 Phase
120V AC	2	1	5	—	5	—
240V AC	5	15	7 1/2	20	10	25
480V AC	5	30	—	40	—	50
600V AC	5	50	—	60	—	75
Short Circuit Withstand Rating at 600 V with Max. Fuse Size/Class:	50 kA/30 A Class J		50 kA/60 A Class J		50 kA/100 A Class J	
Terminal Size Acceptability and Torque (Cu Conductors only, 75°C)	14 – 10 AWG: 35 lb. in. (4.0 Nm) 8 – 1/0 AWG: 65 lb. in. (7.3 Nm)		14 – 10 AWG: 35 lb. in. (4.0 Nm) 8 – 1/0 AWG: 65 lb. in. (7.3 Nm)		14 – 10 AWG: 35 lb. in. (4.0 Nm) 8 – 1/0 AWG: 65 lb. in. (7.3 Nm)	
Screw Head Type	4mm Allen Key		4mm Allen Key		4mm Allen Key	

Dimensions

(to convert to inches multiply by 0.03937)

NOTE: Optional touch protectors shown in light blue.

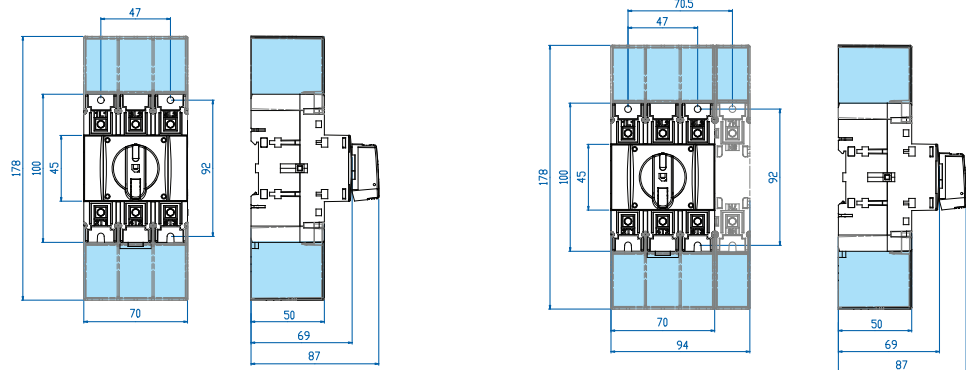

Weight	0.45 kg (4 pole 0.59 kg)		0.45 kg (4 pole 0.59 kg)		0.45 kg (4 pole 0.59 kg)	
---------------	--------------------------	--	--------------------------	--	--------------------------	--

Suitable Accessories

DOOR INTERLOCK HANDLES



Lockable with up to 3 padlocks.


Lockable with up to 3 padlocks.

SIDE MOUNTED AUXILIARY SWITCHES




Cat. No.	LK10 UL	LK10 Y/R UL	LK11 U	LK11 Y/R U	Cat. No.	1.V160KU	2.V160KU
Environmental Rating UL (IEC)	UL Type 4X (IP66)		UL Type 4X (IP67)		No. of Contacts	1n.o./1n.c.	2n.o./2n.c.
Color	Black	Yellow/Red	Black	Yellow/Red	Electrical Rating	16 A/1/2HP/125-250V AC	

DOOR INTERLOCK SHAFT

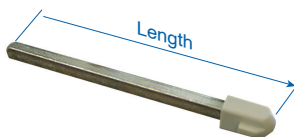

Cat. No.	L100 AD11-ST	L200 AD11-ST	L300AD11-ST
Length (L)	100 mm	200 mm	300 mm
Material	Steel	Steel	Steel

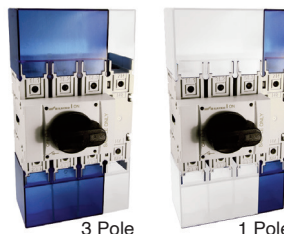

BLUE TOUCH PROTECTOR

Cat. No.	LS/VS 160 3P	LS/VS N160
Poles	3	1

* 6 and 8 pole versions along with changeover version available upon request.