

UL98 Motor Disconnect Switch - Sheet Metal Enclosure



- Can be used locally at the motor
- UL Type 4
- Excellent in harsh weather conditions
- Resistant to many chemicals
- Corrosion and UV resistant
- IEC IP65 Protection Level
- Lockable - Defeatable Handle



All Models are lockable with up to 3 padlocks.

Catalog Number

- Black Handle
- Yellow/Red Handle

	KET330UL98 KET330UL98 Y/R	KET360UL98 KET360UL98 Y/R	KET3100UL98 KET3100UL98 Y/R
No. of Poles	3 (4 pole - KET430UL98 (Y/R))	3 (4 pole - KET460UL98 (Y/R))	3 (4 pole - KET4100UL98 (Y/R))
General Purpose Current	30 A	60 A	100 A
Maximum Voltage	600V AC	600V AC	600V AC


Horsepower Rating /HP	1 Phase	3 Phase	1 Phase	3 Phase	1 Phase	3 Phase
120V AC	2	1	3	—	5	—
240V AC	5	15	7.5	20	10	25
480V AC	5	30	—	40	—	50
600V AC	5	50	—	60	—	75

Short Circuit Withstand Rating at 600 V	50 kA/60 A Class J	50 kA/60 A Class J	50 kA/100 A Class J
---	--------------------	--------------------	---------------------

Terminal Size Acceptability and Torque (Cu Conductors only, 75°C)	14 – 10 AWG: 35 lb. in. (4.0 Nm) 8 – 1/0 AWG: 65 lb. in. (7.3 Nm)	14 – 10 AWG: 35 lb. in. (4.0 Nm) 8 – 1/0 AWG: 65 lb. in. (7.3 Nm)	14 – 10 AWG: 35 lb. in. (4.0 Nm) 8 – 1/0 AWG: 65 lb. in. (7.3 Nm)
--	--	--	--

Screw Head Type	4mm Allen Key	4mm Allen Key	4mm Allen Key
-----------------	---------------	---------------	---------------

Dimensions & Size (to convert to inches multiply by 0.03937)	TR01	TR01	TR02
---	------	------	------

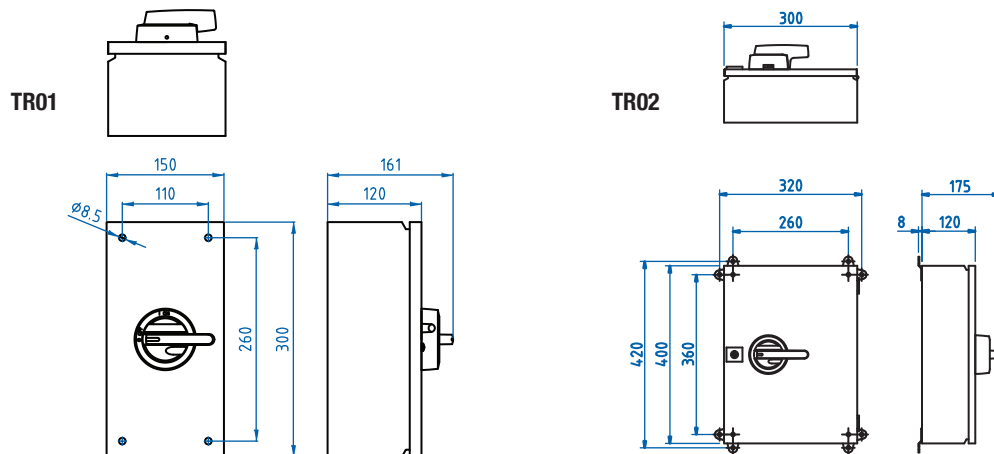

Weight	4.3 kg	4.4 kg	9.7 kg	9.8 kg
--------	--------	--------	--------	--------

Suitable Accessories

AUXILIARY SWITCHES



Cat. No.	1.V160KU	2.V160KU
No. of Contacts	1n.o./1n.c.	2n.o./2n.c.
Electrical Rating	16 A/1/2HP/125-250V AC	