

UL98 Motor Disconnect Switch - Polycarbonate Enclosure



- Can be used locally at the motor
- UL Type 4X
- IEC IP65 Protection Level
- UV resistant
- Resistant to many chemicals
- Lockable - Defeatable Handle





All Models are lockable
with up to 3 padlocks.

Catalog Number

- Yellow/Red Handle
- Black Handle

- Yellow/Red Handle - Black Handle	KEM330UL98 KEM330UL98 Y/R		KEM360UL98 KEM360UL98 Y/R		KEM3100UL98 KEM3100UL98 Y/R		
No. of Poles	3 (4 pole - KEM430UL98 (Y/R))		3 (4 pole - KEM460UL98 (Y/R))		3 (4 pole - KEM4100UL98 (Y/R))		
General Purpose Current	30 A		60 A		100 A		
Maximum Voltage	600V AC		600V AC		600V AC		
Horsepower Rating /HP	1 Phase	3 Phase	1 Phase	3 Phase	1 Phase	3 Phase	
	120V AC	2	1	3	—	5	—
	240V AC	5	15	7.5	20	10	25
	480V AC	5	30	—	40	—	50
	600V AC	5	50	—	60	—	75
Short Circuit Withstand Rating at 600 V	50 kA/60 A Class J		50 kA/60 A Class J		50 kA/100 A Class J		
Terminal Size Acceptability and Torque (Cu Conductors only, 75°C)	14 – 10 AWG: 35 lb. in. (4.0 Nm) 8 – 1/0 AWG: 65 lb. in. (7.3 Nm)		14 – 10 AWG: 35 lb. in. (4.0 Nm) 8 – 1/0 AWG: 65 lb. in. (7.3 Nm)		14 – 10 AWG: 35 lb. in. (4.0 Nm) 8 – 1/0 AWG: 65 lb. in. (7.3 Nm)		
Screw Head Type	4mm Allen Key		4mm Allen Key		4mm Allen Key		
Dimensions & Size <i>(to convert to inches multiply by 0.03937)</i>	MF10		MF10		MF11UL		

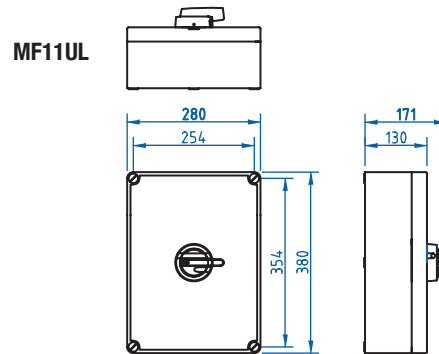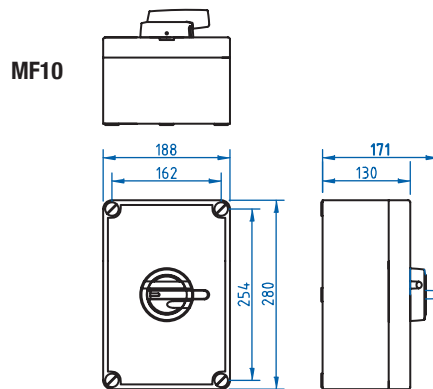

Weight	2.4 kg	3.3 kg	2.5 kg	3.4 kg
--------	--------	--------	--------	--------

Suitable Accessories

AUXILIARY SWITCHES



Cat. No.	1.V160KU	2.V160KU
No. of Contacts	1n.o./1n.c.	2n.o./2n.c.
Electrical Rating	16 A/1/2HP/125-250V AC	