
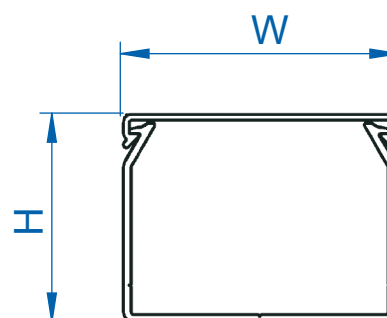




Standard Slot

Supplied with lid

nominal size w x h inches	external dimensions		part no. selection			standard pack	
	width inches (mm)	height inches (mm)	gray RAL 7030	white RAL 9010	black RAL 9005	no. of lengths 6 1/2' each	total feet
1" x 1 1/2"	0.91 (23)	1.40 (35.5)	B25X35S	B25X35S/W	B25X35S/B	12	78
1" x 2"	0.91 (23)	1.89 (48)	B25X50S	B25X50S/W	B25X50S/B	12	78
1" x 3"	0.98 (25)	2.87 (73)	B25X75S	B25X75S/W	B25X75S/B	8	52
1 1/2" x 1 1/2"	1.40 (35.5)	1.40 (35.5)	B35X35S	B35X35S/W	B35X35S/B	12	78
1 1/2" x 2"	1.40 (35.5)	1.89 (48)	B35X50S	B35X50S/W	B35X50S/B	8	52
1 1/2" x 3"	1.40 (35.5)	2.87 (73)	B35X75S	B35X75S/W	B35X75S/B	8	52
2" x 1 1/2"	1.89 (48)	1.40 (35.5)	B50X35S	B50X35S/W	B50X35S/B	8	52
2" x 2"	1.89 (48)	1.89 (48)	B50X50S	B50X50S/W	B50X50S/B	8	52
2" x 3"	1.89 (48)	2.87 (73)	B50X75S	B50X75S/W	B50X75S/B	8	52
2" x 4"	1.89 (48)	3.94 (100)	B50X100S	B50X100S/W	B50X100S/B	4	26
3" x 2"	2.87 (73)	1.89 (48)	B75X50S	B75X50S/W	B75X50S/B	8	52
3" x 3"	2.87 (73)	2.87 (73)	B75X75S	B75X75S/W	B75X75S/B	8	52
3" x 4"	2.87 (73)	3.94 (100)	B75X100S	B75X100S/W	B75X100S/B	4	26
4" x 2"	3.86 (98)	1.89 (48)	B100X50S	B100X50S/W	B100X50S/B	4	26
4" x 3"	3.86 (98)	2.87 (73)	B100X75S	B100X75S/W	B100X75S/B	4	26
4" x 4"	3.86 (98)	3.94 (100)	B100X100S	B100X100S/W	B100X100S/B	4	26
5" x 3"	4.84 (123)	2.87 (73)	B125X75S	B125X75S/W	B125X75S/B	4	26
6" x 4"	5.91 (150)	3.94 (100)	B150X100S	B150X100S/W	B150X100S/B	4	26

MATERIAL

self extinguishing PVC

STANDARD COLORS

gray, white, black

SERVICE TEMPERATURE

+5° F to +149° F (-15° C to +65° C)

FLAMMABILITY

UL94 V-O rated material

STANDARDS

base slots to DIN 43659
/EN 50085-2-3