


200 and 400 A UL 98 Disconnect Switches




- Unique industry feature: Plastic materials can be 100% recycled.
- Switch make/break operation is independent from operator's actuation speed
- Reliable switch for demanding industrial applications
- Contact position check/contact condition inspection window for every pole
- Maximum horsepower rating 300 hp @ 600V AC

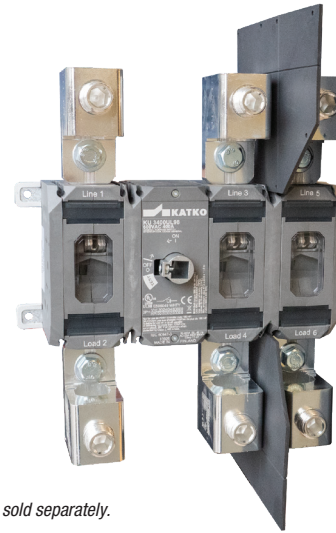

Terminal lugs sold separately.


Catalog Number	KU 3200UL98	KU 3400UL98
No. of Poles*	3 (4 pole - KU 4200UL98)	3 (4 pole - KU 4400UL98)
General Purpose Current	200 A	400 A
Maximum Voltage	600 V AC	600 V AC
Horsepower Rating /HP	3 Phase	3 Phase
120 V AC	30	50
240 V AC	75	100
480 V AC	150	200
600 V AC	200	300
Short Circuit Withstand Rating at 600 V with Max. Fuse Size/Class:	100 kA / 200 A Class J	100 kA / 400 A Class J
Terminal Size Acceptability (Cu Conductors only , 75°C)	2 AWG – 500 kcmil	3/0 AWG – 600 kcmil
Torque	2 AWG - 250 kcmil: 220 lb.in. (24.86 Nm) 300 – 500 kcmil: 490 lb.in. (55.36 Nm)	3/0 AWG – 250 kcmil: 400 lb.in. (45.19 Nm) 300 – 600 kcmil: 660 lb.in. (74.57 Nm)
Terminal Lug (sold separately)	KKL1X240AR250 (6 for 3 pole; 8 for 4 pole)	KKL1X300AR400 (6 for 3 pole; 8 for 4 pole)
Terminal Bolt Set:	M8PP3P, (4 pole - M8PP4P)	M10PP3P, (4 pole - M10PP4P)
Screw Head Type	M8	M10
Shafts	L200AD12T6, L300AD12T6	LVK228, LVK320
Handles	LKX100 (black) LKX100YR (yellow/red)	LKX150 (black) LKX150YR (yellow/red)
Auxiliary Contacts	1.V160KU, 2.V160KU	1.V160KU, 2.V160KU
Terminal Covers	LS250F (low barrier), LS250H (tall barrier)	LS400F (low barrier), LS400H (tall barrier)

KU 3200UL98 & KU 4200UL98

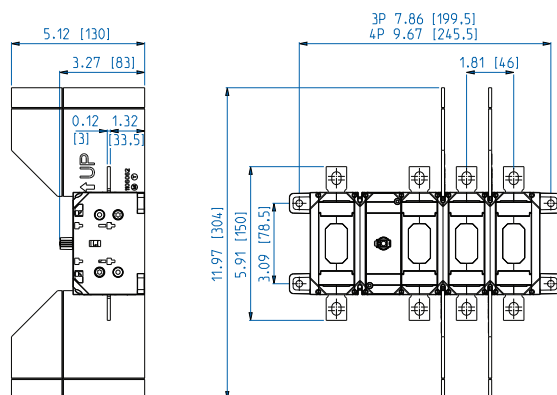

(Shown in mm, to convert to inches multiply by 0.03937)

KU 3400UL98 & KU 4400UL98

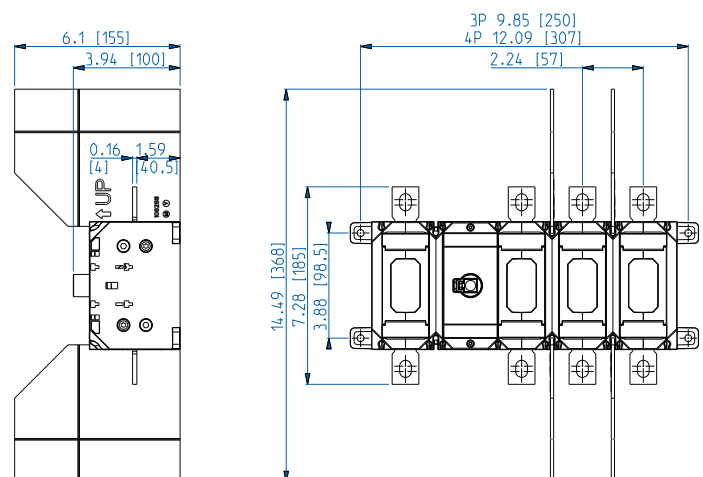

200 and 400 A UL 98 Disconnect Switches



Accessories

Handles



LKX100



LKX100/YR



LKX150



LKX150/YR

Shafts



L200AD12T6
L300AD12T6

LVK228
LVK320

Auxiliary Contacts



1.V160KU
2.V160KU

Terminal Lugs



KKL1X240AR250



KKL1X300AR400

Terminal Covers



LS250F (low barrier)
LS400F (low barrier)



LS250H (tall barrier)
LS400H (tall barrier)

Terminal Bolt Set



M8PP3P, (4 pole - M8PP4P)



M10PP3P, (4 pole - M10PP4P)